
TELEMATICS & SENSORIC SOLUTIONS

Temperature Sensor X-RAYL® SENSOR S3TMP-D



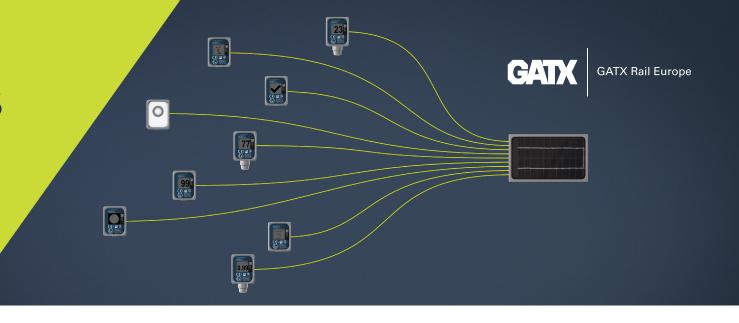

The temperature sensor can be used to monitor product quality, heating devices and valve temperature. Additionally it can be used for temperature drop/spike alerts. It can also be integrated with your existing logistics applications.

Features

Weight 0.25 kg

Dimensions 70 x 55 x 35 mm

Battery lifetime Up to IO years

Casing material Aluminum

ATEX certification II 2 G Ex ib IIC T6 Gb, II 2 D Ex ib IIIC 85 °C Db

ATEX temperature range (ambient) -40 to 60 °C

IP Protection according to EN 60529:2014-09 IP69

Measurement range of external probe -30 to 250 °C

Precision of external probe I.4 °C

Cable length of external probe 5 m

Totally maintenance-free Yes

Transmission interval Starting from I hour

Event-Portal reaction time under 2 minutes Yes

Scan the QR-Code for more details:

