

Uacns / GATX type 8082

USAGE

This 4-axle rail car is used in various sectors for the transportation of pulverized and fine-grain products, such as cement, lime and chemical products in powdered form.

PAYLOAD TABLE

	A	B	C	D
S	46.4 t	54.4 t	64.4 t	72.4 t
I20	0.0			

PRODUCT DETAILS


Capacity	82.0 m³
Tare weight	17.6 t
Loading weight	72.4 t
Total weight	90.0 t
Length over buffers	16,240 mm
Distance between outer axles	13,000 mm



Scan the
QR-code for
more details:



#railcarleasingmadeeasier
www.gatx.eu

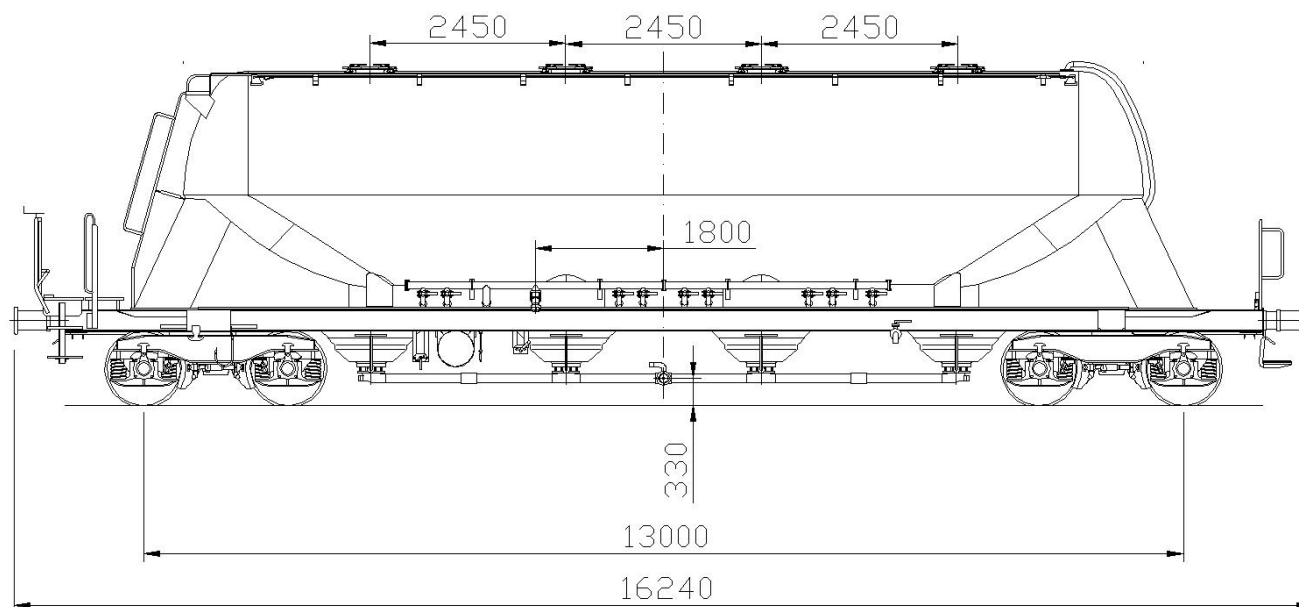

TANK DATA

Tank/Silo material	AW-5186
Working pressure	2.5 bar
Hoppers	4

LOADING/UNLOADING DEVICES

Loading domes	4
Fast sealing cover	DN 500
Filter cloth	yes
Collecting pipe	middle
Product connection	5 1/2" thread
Unloading system	pneumatic
Unloading height	330 mm

