

Zagkks / GATX type 7498

USAGE

The 4-axled rail tank car is used for the transportation of gases, liquefied under pressure.

PAYLOAD TABLE

	A	B	C
S	29.5 t	37.5 t	45.5 t
I20		0.0	

PRODUCT DETAILS


Capacity	110.0 m ³
Tare weight	34.5 t
Total weight	80.0 t
Length over buffers	18,000 mm
Distance between outer axles	13,900 mm



Scan the
QR-code for
more details:



#railcarleasingmadeeasier
www.gatx.eu

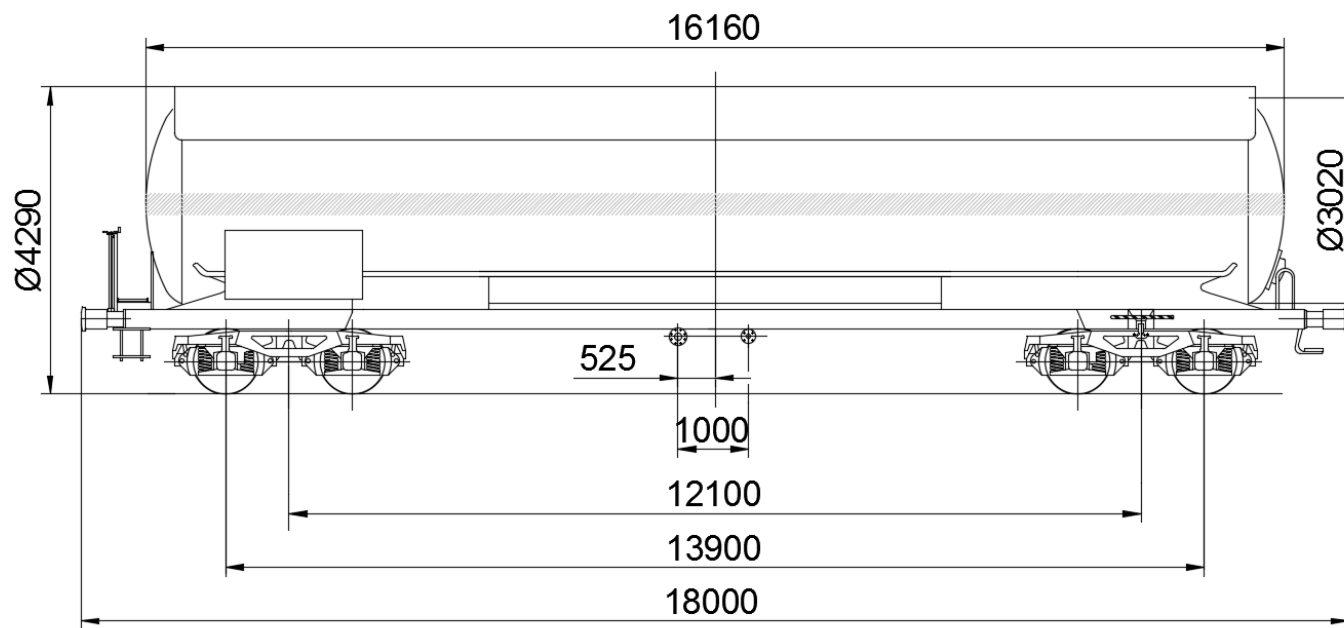

TANK DATA

Tank code	P26BH
Test pressure	26 bar
Tank material	Fine grained steel
Lowest filling temperature	-20°C
Sun shield	Yes

LOADING/UNLOADING DEVICES

Side valve phase	DN 80
Salve valve gas phase	DN 80
reduced to	DN 50
Bottom valve liquid phase	DN 80
Bottom valve gas phase	DN 80

