

Zagns / GATX type 7363

USAGE

The 4-axled rail tank car is used for the transportation of gases, liquefied under pressure. The construction is optimized for products with a high density such as Chloridflourmethane (gas as refrigerant R22).

PAYLOAD TABLE

	A	B	C	D
S	38.8 t	46.8 t	56.8 t	64.8 t
I20	0.0			

PRODUCT DETAILS


Capacity	63.0 m ³
Tare weight	25.2 t
Total weight	90.0 t
Length over buffers	14,700 mm
Distance between outer axles	11,460 mm



Scan the QR-code for more details:



#railcarleasingmadeeasier
www.gatx.eu

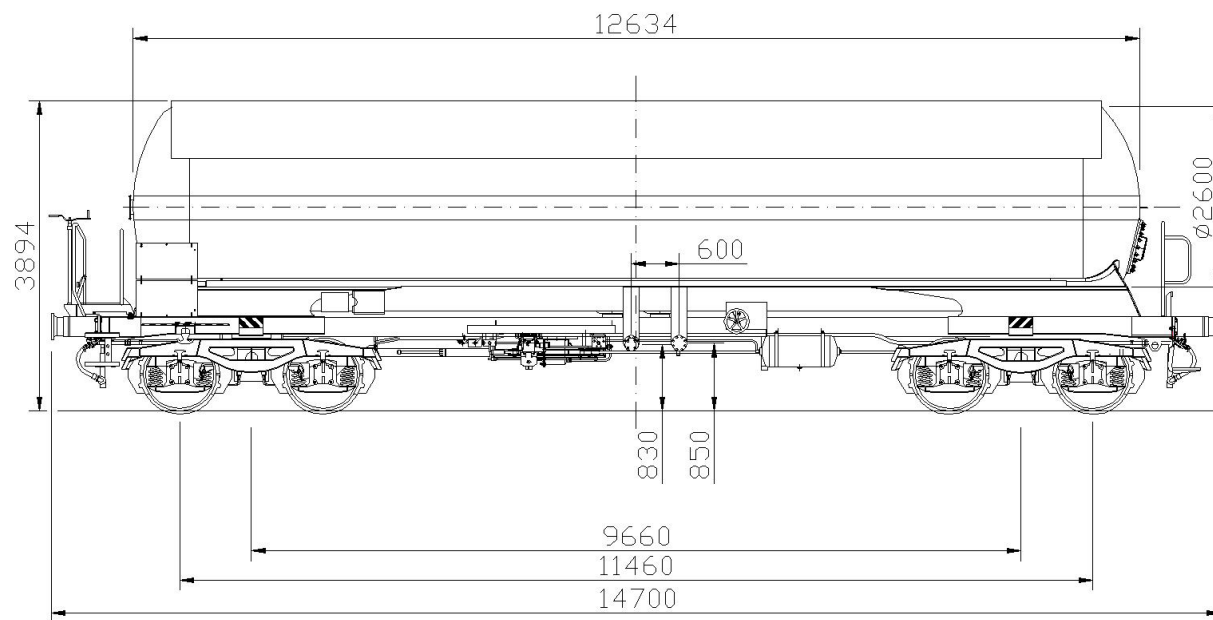

TANK DATA

Tank code	P24BH
Test pressure	24 bar
Tank material	Fine grained steel
Lowest filling temperature	-40 °C
Sun shield	Yes

LOADING/UNLOADING DEVICES

Side valve liquid phase	DN 80
Side valve gas phase	DN 80
reduced to	DN 50
Bottom valve liquid phase	DN 80
Bottom valve gas phase	DN 80

